


## 75 mm Straightcurve Flexline

### PRODUCT TECHNICAL DATA SHEET

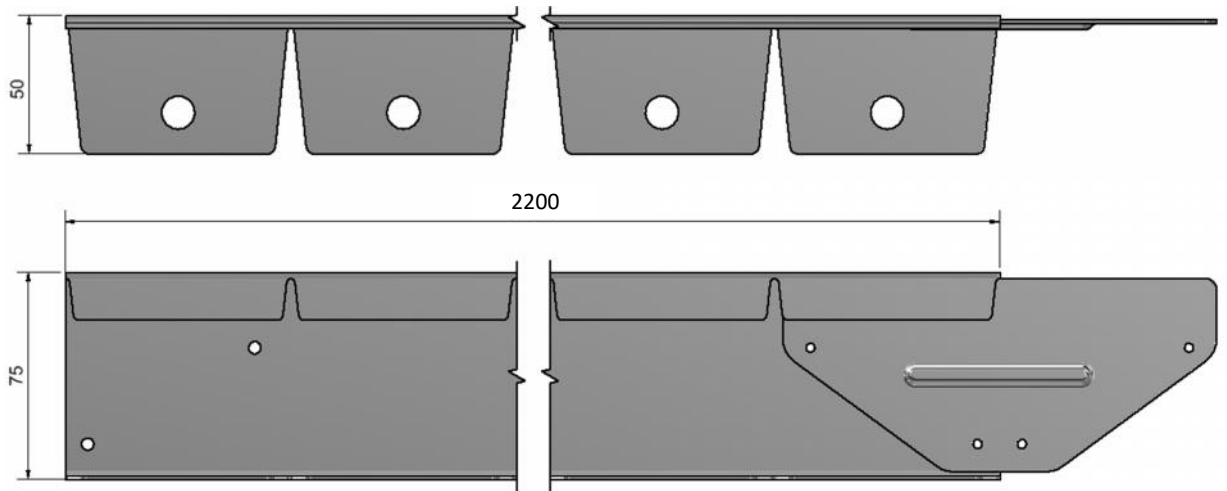

#### APPLICATION

75mm Straightcurve Flexline is used to lock in pavers, gravel paths, bitumen or is used as a separator between different type ground coverings. It can also be used for non-invasive grasses that don't have a deep root system.

#### FEATURES


- Pre drilled holes;
  - \* guarantees perfect alignment of edges
  - \* no drilling required
  - \* no clamping required
- Connector plate pre-attached
- Reinforced connector plate for continuous rigidity
- Notched top lip for increased flexibility and consistent flexible behaviour
- Weathering steel
- Heavy duty
- (Galvanised steel on request)

#### TECHNICAL SPECIFICATIONS

Material:	Weathering steel alloy Q345GNHL
Finish:	Black (rusts over time)
Height:	75 mm
Length:	2200 mm
Base width:	50 mm
Thickness:	1.5 mm
Weight:	3.6 kg

#### REQUIRED FASTENERS

Join lengths with Teks® screws 10G - 16 mm or use 4mm pop rivets.

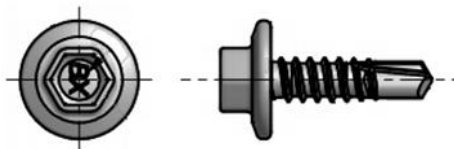

## INSTALLATION INSTRUCTIONS

- Mark the desired line on the ground with marker paint
  - Place the edges roughly on the line
  - Join lengths with Teks® screws in situ
  - Secure edge in place with Straightcurve Fixing Pins
- 

## REQUIRED TOOLS

- Hammer
  - Angle grinder
  - Cordless drill with 5/16 hex drive when using Teks® Screws
  - Pop Rivet gun when using pop rivets
- 

## REQUIRED ACCESSORIES

Straightcurve Fixing Pins

